Technical Publications

Direction 2089507

Centricity Universal Viewer Zero Footprint (ZFP) DICOM CONFORMANCE STATEMENT

Copyright© 2020 by General Electric Co.

REVISION HISTORY

Revision	Date	Author	Description
1	7-May-2015	Shilpa Venkataraman	Initial version for Centricity Universal Viewer Zero Footprint v6.0.
2	16-June-2015	Rugma Ramesh	Updated version for Centricity Universal Viewer Zero Footprint v6.0-SP1. Added SOPs for Multi-Frame Grayscale Byte SC Image, Multi-Frame True Color SC Image, NM Image (Retired) and RT image.
3	29-June-2015	Rugma Ramesh	Updated version for Centricity Universal Viewer Zero Footprint v6.0-SP1. Updated all existing SOP Classes and SOP Class UIDs
4	22-Mar-2016	Rugma Ramesh	Updated version for Centricity Universal Viewer Zero Footprint v6.0-SP3. Updated the SOP Class UID for Ultrasound Multi-frame Image Storage. Added Grayscale Softcopy Presentation State Storage SOP Class.
5	02-March-2017	Igor Bendersky	Updated version for Centricity Universal Viewer Zero Footprint v6.0-SP6. Updated document to indicate that ZFP now supports GE HealthCloud Object Store deployments. Added application data flow diagrams (sections 2.2.1-2.2.3). Added addition information for sequencing of real-works activities (section 2.2.3.1 and 2.2.3.2). Added window/level computation and pixel spacing handling information (section 2.3). Indicated that ZFP supports other languages in addition to English (section 2.4).
6	09-February-2019	Matt Adler	Updated version for Centricity Universal Viewer Zero Footprint v6.0-SP10. 12-Lead ECG Waveform Storage (for GE Only) (Section 2.3.3)
7	17-April-2019	Zarahlou Tabaranza	Updated version for Centricity Universal Viewer Zero Footprint v6.0-SP10.2 Audit trail messaging in relation to ATNA implementation.
8	29-Sep-2020	Komal Pavitra	Updated version for Centricity Universal Viewer Zero Footprint v6.0-SP11.3 Updated Table 0.1 and 2.1 – Displayable SOP classes Updated section 2.4 to include UTF8 for Dicom Webservices Updated section 2.5 with Photometric interpretation support Updated section 2.7 to include QIDO-RS specification

9	29-June-2021	Ashish Kumar Sharma	Updated version for Centricity Universal Viewer Zero Footprint v6.0-SP11.4. Added a note at the end of Displayable SOP Classes "Limited capability to support display of Electrocardiogram". Updated DICOM reference sections in Application Data Flow Diagram at section 2.2.1.1, 2.2.1.2 and 2.2.1.3 Updated status codes for DICOM WEB service at section 2.7.4 Updated details od WADO-RS and QIDO-RS sections. Updated section 2.8 and 2.8.12 for RAD-69 Retrieve Imaging Document Set.

THIS PAGE LEFT INTENTIONALLY BLANK

CONFORMANCE STATEMENT OVERVIEW

The Universal Viewer ZFP is a viewing application of DICOM objects that are stored on the Centricity Enterprise Archive or the Centricity PACS server. All of the networking, database, and other services are provided by the Centricity Enterprise Archive or the Centricity PACS server. This conformance claim refers to the conformance claim for the Centricity Enterprise Archive or the Centricity PACS server for all such services. The Universal Viewer ZFP accesses rendered DICOM Objects as a client user of WADO-URI service. Table 0.1 provides an overview of the DICOM objects can be displayed by ZFP.

Table 0.1 – Displayable SOP Classes

SOP Classes	SOP Class UID
Computed Radiography Image Storage	1.2.840.10008.5.1.4.1.1.1
CT Image Storage	1.2.840.10008.5.1.4.1.1.2
Enhanced CT Image Storage	1.2.840.10008.5.1.4.1.1.2.1
Ultrasound Image Storage (Retired)	1.2.840.10008.5.1.4.1.1.6
Ultrasound Multi-Frame Image Storage (Retired)	1.2.840.10008.5.1.4.1.1.3
Ultrasound Multi-frame Image Storage	1.2.840.10008.5.1.4.1.1.3.1
Grayscale Softcopy Presentation State Storage	1.2.840.10008.5.1.4.1.1.11.1
MR Image Storage	1.2.840.10008.5.1.4.1.1.4
Enhanced MR Image Storage	1.2.840.10008.5.1.4.1.1.4.1
Nuclear Medicine Image Storage	1.2.840.10008.5.1.4.1.1.20
Positron Emission Tomography Image Storage	1.2.840.10008.5.1.4.1.1.128
Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7
Ultrasound Image Storage	1.2.840.10008.5.1.4.1.1.6.1
X-Ray Angiographic Image Storage	1.2.840.10008.5.1.4.1.1.12.1
X-Ray Radiofluoroscopic Image Storage	1.2.840.10008.5.1.4.1.1.12.2
Digital X-Ray Image Storage - For Presentation	1.2.840.10008.5.1.4.1.1.1.1
Digital X-Ray Image Storage - For Processing	1.2.840.10008.5.1.4.1.1.1.1.1
Digital Mammography X-Ray Image Storage – for Presentation	1.2.840.10008.5.1.4.1.1.1.2
Digital Mammography X-Ray Image Storage – for Processing	1.2.840.10008.5.1.4.1.1.1.2.1
Digital Intra-oral X-Ray Image Storage - For Presentation	1.2.840.10008.5.1.4.1.1.1.3
Digital Intra-oral X-Ray Image Storage - For Processing	1.2.840.10008.5.1.4.1.1.1.3.1
VL Endoscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.1
VL Microscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.2
VL Slide-Coordinates Microscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.3
VL Photographic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.4
Key Object Selection Document	1.2.840.10008.5.1.4.1.1.88.59
Basic Text SR	1.2.840.10008.5.1.4.1.1.88.11
Breast Tomosynthesis Image Storage	1.2.840.10008.5.1.4.1.1.13.1.3
Encapsulated PDF Storage	1.2.840.10008.5.1.4.1.1.104.1
Ophthalmic Tomography Image Storage	1.2.840.10008.5.1.4.1.1.77.1.5.4
Multi-frame Grayscale Byte Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7.2

SOP Classes	SOP Class UID
Multi-frame True Color Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7.4
NM Image (Retired)	1.2.840.10008.5.1.4.1.1.5
RT Image	1.2.840.10008.5.1.4.1.1.481.1
12-lead ECG Waveform Storage*	1.2.840.10008.5.1.4.1.1.9.1.1

* Limited capability to support display of Electrocardiogram. Refer section 2.3.3

TABLE OF CONTENTS

1. INTRODUCTION 8

1.1 Overview 8

1.2 Overall DICOM Conformance Statement Document Structure 9

1.3 Intended Audience 10

1.4 Scope and Field of Application 10

1.5 Important Remarks 10

1.6 References 11

1.7 Definitions 11

1.8 Symbols and Abbreviations 13

2. NETWORK CONFORMANCE STATEMENT 15

2.1 Introduction 15

2.2 Implementation Model 16

2.2.1 Application Data Flow Diagram 16

2.2.2 Real-World Activity – Viewing a DICOM Object 19

2.2.3 Sequencing of Real-World Activities 19

2.3 Extensions / Specializations / Privatizations 19

2.3.1 Window/Level Computation 19

2.3.2 Pixel Spacing Handling 20

2.3.3 Electrocardiogram Support 20

2.4 Support of Extended Character Sets 22

2.5 Photometric Interpretation Support 23

2.6 Security Profiles 24

2.7 DICOM WEB Service 24

2.7.1 WADO-URI Specification 24

2.7.2 WADO-RS Specification 25

2.7.3 QIDO-RS Specification 26

2.7.4 Status Code details of DICOM Web services : 27

2.8 Retrive Imaging document set **28**

2.9 Audit Trail Messages **29**
2.9.1 Application Activity 29
2.9.2 Instance Accessed 29
2.9.3 Query 30
2.9.4 Registry Stored Query 33
2.9.5 Retrieve Document Set 34
2.9.6 Update Document Set 36
2.9.7 Document Viewed 36
2.9.8 Document Download 37
2.9.9 Emergency Override 38
2.9.10 Instance Transferred 39
2.9.11 Execute Document Workflow Task 40
2.9.12 Retrieve Imaging Document Set 41

1. INTRODUCTION

1.1 OVERVIEW

This DICOM Conformance Statement is divided into Sections as described below:
Section 1 (Introduction), which describes the overall structure, intent, and references for this Conformance Statement
Section 2 (Network Conformance Statement), which specifies the GEHC equipment compliance to the DICOM requirements for the implementation of Networking features.

1.2 OVERALL DICOM CONFORMANCE STATEMENT DOCUMENT STRUCTURE

The Documentation Structure of the GEHC DICOM Conformance Statements is shown in the Illustration below.

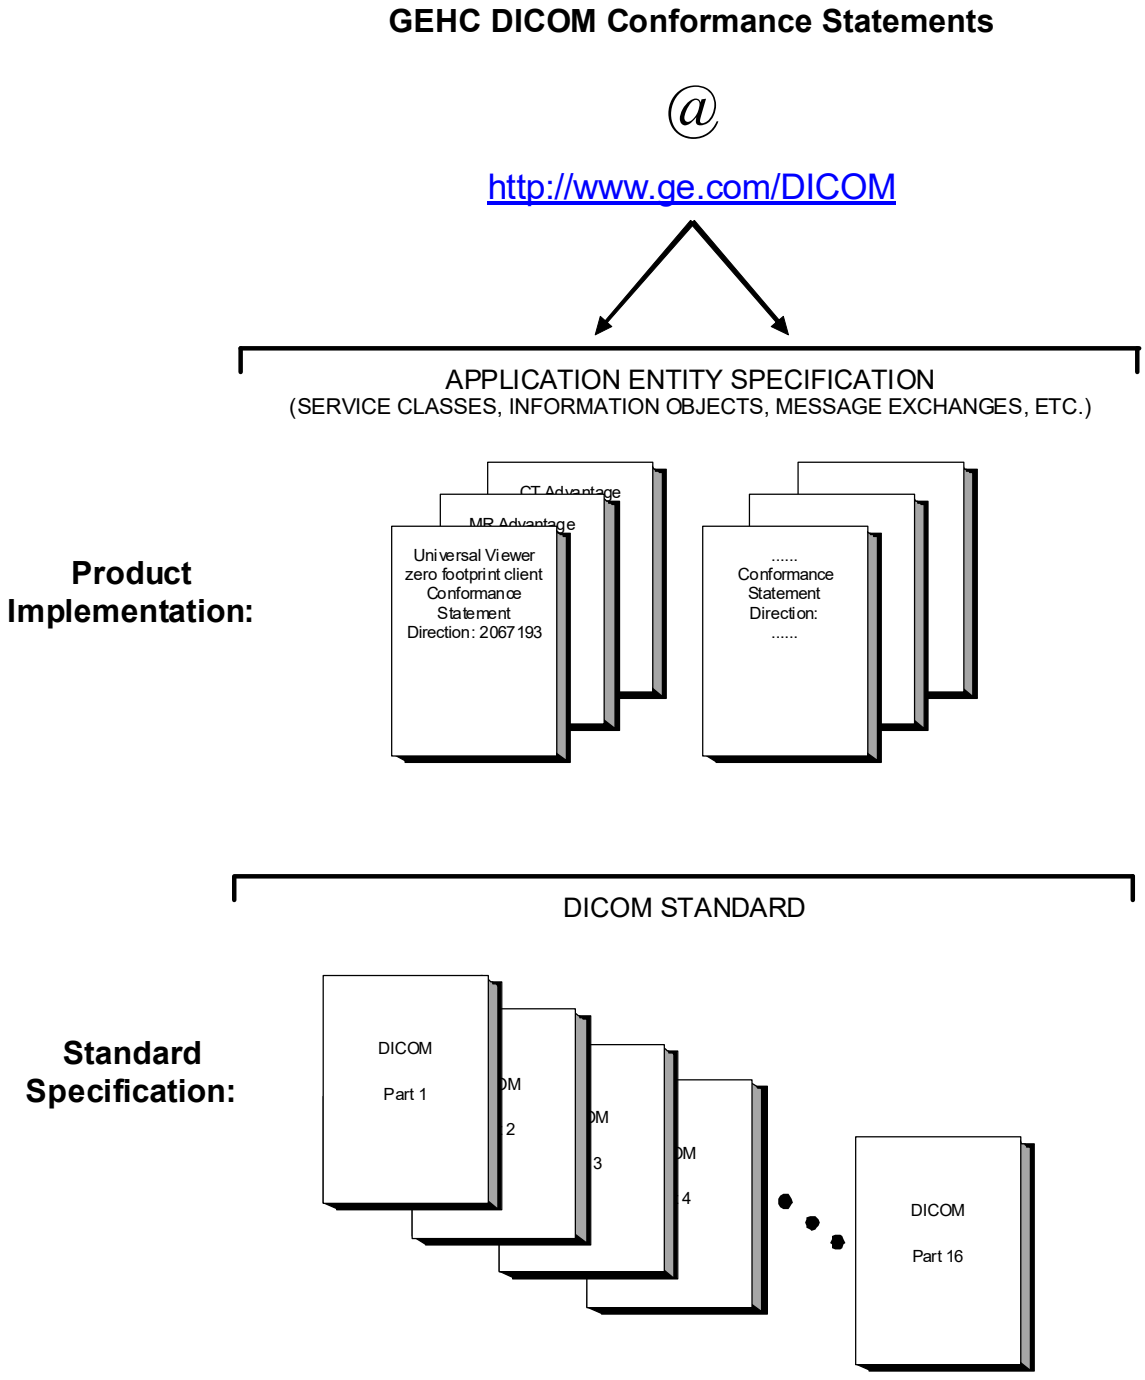

This document specifies the DICOM implementation. It is entitled:

Universal Viewer ZFP

Conformance Statement for DICOM

*Direction **2089507***

This DICOM Conformance Statement documents the DICOM Conformance Statement and Technical Specification required to interoperate with the GEHC network interface.
The GEHC Conformance Statement, contained in this document, also specifies the Lower Layer communications which it supports (e.g., TCP/IP). However, the Technical Specifications are defined in the DICOM Part 8 standard.
For more information regarding DICOM, copies of the Standard may be obtained on the Internet at http://medical.nema.org. Comments on the Standard may be addressed to:

DICOM Secretariat
NEMA
1300 N. 17th Street, Suite 1752
Rosslyn, VA 22209
USA
Phone: +1.703.841.3200

1.3 INTENDED AUDIENCE

The reader of this document is concerned with software design and/or system integration issues. It is assumed that the reader of this document is familiar with the DICOM Standard and with the terminology and concepts which are used in that Standard.

1.4 SCOPE AND FIELD OF APPLICATION

It is the intent of this document to provide an unambiguous specification for GEHC implementations. This specification, called a Conformance Statement, includes a DICOM Conformance Statement and is necessary to ensure proper processing and interpretation of GEHC medical data exchanged using DICOM. The GEHC Conformance Statements are available to the public.
The reader of this DICOM Conformance Statement should be aware that different GEHC devices are capable of using different Information Object Definitions. For example, a GEHC CT Scanner may send images using the CT Information Object, MR Information Object, Secondary Capture Object, etc.
Included in this DICOM Conformance Statement are the Module Definitions which define all data elements used by this GEHC implementation. If the user encounters unspecified private data elements while parsing a GEHC Data Set, the user is well advised to ignore those data elements (per the DICOM standard). Unspecified private data element information is subject to change without notice. If, however, the device is acting as a "full fidelity storage device", it should retain and re-transmit all of the private data elements which are sent by GEHC devices.

1.5 IMPORTANT REMARKS

The use of these DICOM Conformance Statements, in conjunction with the DICOM Standards, is intended to facilitate communication with GE imaging equipment. However, **by itself, it is not sufficient to ensure that inter-operation will be successful**. The **user (or user's agent)** needs to proceed with caution and address at least four issues:

- **Integration** - The integration of any device into an overall system of interconnected devices goes beyond the scope of standards (DICOM v3.0), and of this introduction and associated DICOM Conformance Statements when interoperability with non-GE equipment is desired. The responsibility to analyze the applications requirements and to design a solution that

integrates GE imaging equipment with non–GE systems is the **user's** responsibility and should not be underestimated. The **user** is strongly advised to ensure that such an integration analysis is correctly performed.

- **Validation** - Testing the complete range of possible interactions between any GE device and non–GE devices, before the connection is declared operational, should not be overlooked. Therefore, the **user** should ensure that any non–GE provider accepts full responsibility for all validation required for their connection with GE devices. This includes the accuracy of the image data once it has crossed the interface between the GE imaging equipment and the non–GE device and the stability of the image data for the intended applications.

  Such a validation is required before any clinical use (diagnosis and/or treatment) is performed. It applies when images acquired on GE imaging equipment are processed/displayed on a non-GE device, as well as when images acquired on non-GE equipment is processed/displayed on a GE console or workstation.
- **Future Evolution** - GE understands that the DICOM Standard will evolve to meet the user's growing requirements. GE is actively involved in the development of the DICOM Standard. DICOM will incorporate new features and technologies and GE may follow the evolution of the Standard. The GEHC protocol is based on DICOM as specified in each DICOM Conformance Statement. Evolution of the Standard may require changes to devices which have implemented DICOM. **In addition, GE reserves the right to discontinue or make changes to the support of communications features (on its products) described by these DICOM Conformance Statements**. The **user** should ensure that any non–GE provider, which connects with GE devices, also plans for the future evolution of the DICOM Standard. Failure to do so will likely result in the loss of function and/or connectivity as the DICOM Standard changes and GE Products are enhanced to support these changes.
- **Interaction** - It is the sole responsibility of the **non–GE provider** to ensure that communication with the interfaced equipment does not cause degradation of GE imaging equipment performance and/or function.

1.6 REFERENCES

1. Digital Imaging and Communications in Medicine (DICOM) Standards, available free at http://medical.nema.org/

2. Centricity Enterprise Archive V4.0 DICOM CONFORMANCE STATEMENT, DOC0708777

3. Centricity PACS Version 4.0 DICOM CONFORMANCE STATEMENT, DOC1145900

1.7 DEFINITIONS

Informal definitions are provided for the following terms used in this Conformance Statement. The DICOM Standard is the authoritative source for formal definitions of these terms.
Abstract Syntax – the information agreed to be exchanged between applications, generally equivalent to a Service/Object Pair (SOP) Class. Examples: Verification SOP Class, Modality Worklist Information Model Find SOP Class, Computed Radiography Image Storage SOP Class.

Application Entity (AE) – an end point of a DICOM information exchange, including the DICOM network or media interface software; i.e., the software that sends or receives DICOM information objects or messages. A single device may have multiple Application Entities.
Application Entity Title – the externally known name of an *Application Entity*, used to identify a DICOM application to other DICOM applications on the network.
Application Context – the specification of the type of communication used between *Application Entities*. Example: DICOM network protocol.
Association – a network communication channel set up between *Application Entities*.
Attribute – a unit of information in an object definition; a data element identified by a *tag*. The information may be a complex data structure (Sequence), itself composed of lower level data elements. Examples: Patient ID (0010,0020), Accession Number (0008,0050), Photometric Interpretation (0028,0004), Procedure Code Sequence (0008,1032).
Information Object Definition (IOD) – the specified set of *Attributes* that comprise a type of data object; does not represent a specific instance of the data object, but rather a class of similar data objects that have the same properties. The *Attributes* may be specified as Mandatory (Type 1), Required but possibly unknown (Type 2), or Optional (Type 3), and there may be conditions associated with the use of an Attribute (Types 1C and 2C). Examples: MR Image IOD, CT Image IOD, Print Job IOD.
Joint Photographic Experts Group (JPEG) – a set of standardized image compression techniques, available for use by DICOM applications.
Media Application Profile – the specification of DICOM information objects and encoding exchanged on removable media (e.g., CDs)
Module – a set of *Attributes* within an *Information Object Definition* that are logically related to each other. Example: Patient Module includes Patient Name, Patient ID, Patient Birth Date, and Patient Sex.
Negotiation – first phase of *Association* establishment that allows *Application Entities* to agree on the types of data to be exchanged and how that data will be encoded.
Presentation Context – the set of DICOM network services used over an *Association*, as negotiated between *Application Entities*; includes *Abstract Syntaxes* and *Transfer Syntaxes*.
Protocol Data Unit (PDU) – a packet (piece) of a DICOM message sent across the network. Devices must specify the maximum size packet they can receive for DICOM messages.
Security Profile – a set of mechanisms, such as encryption, user authentication, or digital signatures, used by an *Application Entity* to ensure confidentiality, integrity, and/or availability of exchanged DICOM data
Service Class Provider (SCP) – role of an *Application Entity* that provides a DICOM network service; typically, a server that performs operations requested by another *Application Entity* (*Service Class User*). Examples: Picture Archiving and Communication System (image storage SCP, and image query/retrieve SCP), Radiology Information System (modality worklist SCP).
Service Class User (SCU) – role of an *Application Entity* that uses a DICOM network service; typically, a client. Examples: imaging modality (image storage SCU, and modality worklist SCU), imaging workstation (image query/retrieve SCU)
Service/Object Pair (SOP) Class – the specification of the network or media transfer (service) of a particular type of data (object); the fundamental unit of DICOM interoperability specification. Examples: Ultrasound Image Storage Service, Basic Grayscale Print Management.
Service/Object Pair (SOP) Instance – an information object; a specific occurrence of information exchanged in a *SOP Class*. Examples: a specific x-ray image.

Tag – a 32-bit identifier for a data element, represented as a pair of four digit hexadecimal numbers, the "group" and the "element". If the "group" number is odd, the tag is for a private (manufacturer-specific) data element. Examples: (0010,0020) [Patient ID], (07FE,0010) [Pixel Data], (0019,0210) [private data element]

Transfer Syntax – the encoding used for exchange of DICOM information objects and messages. Examples: *JPEG* compressed (images), little endian explicit value representation.

Unique Identifier (UID) – a globally unique "dotted decimal" string that identifies a specific object or a class of objects; an ISO-8824 Object Identifier. Examples: Study Instance UID, SOP Class UID, SOP Instance UID.

Value Representation (VR) – the format type of an individual DICOM data element, such as text, an integer, a person's name, or a code. DICOM information objects can be transmitted with either explicit identification of the type of each data element (Explicit VR), or without explicit identification (Implicit VR); with Implicit VR, the receiving application must use a DICOM data dictionary to look up the format of each data element.

1.8 SYMBOLS AND ABBREVIATIONS

AE	Application Entity
AET	Application Entity Title
CAD	Computer Aided Detection
CDA	Clinical Document Architecture
CD-R	Compact Disk Recordable
CSE	Customer Service Engineer
CR	Computed Radiography
CT	Computed Tomography
DHCP	Dynamic Host Configuration Protocol
DICOM	Digital Imaging and Communications in Medicine
DIT	Directory Information Tree (LDAP)
DN	Distinguished Name (LDAP)
DNS	Domain Name System
DX	Digital X-ray
ECG	Electrocardiogram
FSC	File-Set Creator
FSU	File-Set Updater
FSR	File-Set Reader
GSDF	Grayscale Standard Display Function
GSPS	Grayscale Softcopy Presentation State
HIS	Hospital Information System
HL7	Health Level 7 Standard
IHE	Integrating the Healthcare Enterprise
IOD	Information Object Definition
IPv4	Internet Protocol version 4
IPv6	Internet Protocol version 6
ISO	International Organization for Standards
IO	Intra-oral X-ray
JPEG	Joint Photographic Experts Group
LDAP	Lightweight Directory Access Protocol

LDIF	LDAP Data Interchange Format
LUT	Look-up Table
MAR	Medication Administration Record
MPEG	Moving Picture Experts Group
MG	Mammography (X-ray)
MPPS	Modality Performed Procedure Step
MR	Magnetic Resonance Imaging
MSPS	Modality Scheduled Procedure Step
MTU	Maximum Transmission Unit (IP)
MWL	Modality Worklist
NM	Nuclear Medicine
NTP	Network Time Protocol
O	Optional (Key Attribute)
OCT	Ophthalmic Tomography
OP	Ophthalmic Photography
OSI	Open Systems Interconnection
PACS	Picture Archiving and Communication System
PET	Positron Emission Tomography
PDF	Portable Document Format
PDU	Protocol Data Unit
R	Required (Key Attribute)
RDN	Relative Distinguished Name (LDAP)
RF	Radiofluoroscopy
RIS	Radiology Information System
RT	Radiotherapy
SC	Secondary Capture
SCP	Service Class Provider
SCU	Service Class User
SOP	Service-Object Pair
SPS	Scheduled Procedure Step
SR	Structured Reporting
TCP/IP	Transmission Control Protocol/Internet Protocol
U	Unique (Key Attribute)
UL	Upper Layer
US	Ultrasound
VL	Visible Light
VR	Value Representation
XA	X-ray Angiography

2. NETWORK CONFORMANCE STATEMENT

2.1 INTRODUCTION

This section of the DICOM Conformance Statement specifies the Universal Viewer ZFP compliance to DICOM requirements for **Networking** features.
The Universal Viewer ZFP is a viewing application. The Universal Viewer ZFP does not directly communicate using DICOM network protocols with external equipment however it does read DICOM objects from the Centricity Enterprise Archive or the Centricity PACS server. This section will define the DICOM objects supported by the application and any limitations dictated by DICOM defined content within the objects.
Table 2-1 lists the DICOM objects supported by the Universal Viewer ZFP for viewing purposes. Although the host server may support additional SOP Classes, the Universal Viewer ZFP is only able to interpret objects that meet the conditions in the table below.

Table 2-1 – Displayable SOP Classes

SOP Classes	SOP Class UID
Computed Radiography Image Storage	1.2.840.10008.5.1.4.1.1.1
CT Image Storage	1.2.840.10008.5.1.4.1.1.2
Enhanced CT Image Storage	1.2.840.10008.5.1.4.1.1.2.1
Ultrasound Image Storage (Retired)	1.2.840.10008.5.1.4.1.1.6
Ultrasound Multi-Frame Image Storage (Retired)	1.2.840.10008.5.1.4.1.1.3
Ultrasound Multi-frame Image Storage	1.2.840.10008.5.1.4.1.1.3.1
Grayscale Softcopy Presentation State Storage	1.2.840.10008.5.1.4.1.1.11.1
MR Image Storage	1.2.840.10008.5.1.4.1.1.4
Enhanced MR Image Storage	1.2.840.10008.5.1.4.1.1.4.1
Nuclear Medicine Image Storage	1.2.840.10008.5.1.4.1.1.20
Positron Emission Tomography Image Storage	1.2.840.10008.5.1.4.1.1.128
Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7
Ultrasound Image Storage	1.2.840.10008.5.1.4.1.1.6.1
X-Ray Angiographic Image Storage	1.2.840.10008.5.1.4.1.1.12.1
X-Ray Radiofluoroscopic Image Storage	1.2.840.10008.5.1.4.1.1.12.2
Digital X-Ray Image Storage - For Presentation	1.2.840.10008.5.1.4.1.1.1.1
Digital X-Ray Image Storage - For Processing	1.2.840.10008.5.1.4.1.1.1.1.1
Digital Mammography X-Ray Image Storage – for Presentation	1.2.840.10008.5.1.4.1.1.1.2
Digital Mammography X-Ray Image Storage – for Processing	1.2.840.10008.5.1.4.1.1.1.2.1
Digital Intra-oral X-Ray Image Storage - For Presentation	1.2.840.10008.5.1.4.1.1.1.3
Digital Intra-oral X-Ray Image Storage - For Processing	1.2.840.10008.5.1.4.1.1.1.3.1
VL Endoscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.1

SOP Classes	SOP Class UID
VL Microscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.2
VL Slide-Coordinates Microscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.3
VL Photographic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.4
Key Object Selection Document	1.2.840.10008.5.1.4.1.1.88.59
Basic Text SR	1.2.840.10008.5.1.4.1.1.88.11
Breast Tomosynthesis Image Storage	1.2.840.10008.5.1.4.1.1.13.1.3
Encapsulated PDF Storage	1.2.840.10008.5.1.4.1.1.104.1
Ophthalmic Tomography Image Storage	1.2.840.10008.5.1.4.1.1.77.1.5.4
Multi-frame Grayscale Byte Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7.2
Multi-frame True Color Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7.4
NM Image (Retired)	1.2.840.10008.5.1.4.1.1.5
RT Image	1.2.840.10008.5.1.4.1.1.481.1
12-lead ECG Waveform Storage*	1.2.840.10008.5.1.4.1.1.9.1.1

* Limited capability to support display of Electrocardiogram. Refer section 2.3.3

2.2 IMPLEMENTATION MODEL

2.2.1 Application Data Flow Diagram

2.2.1.1 Storage AE For SOP Instance Display

The Storage AE implements the SCP roles of the DICOM Storage SOP classes for storing DICOM Storage SOP instances.

Note: The Storage AE services are provided by their configured backend application server. As such, Universal Viewer ZFP does not directly handle DICOM network features related to Storage AE. It communicates to the backend application server using an internal service API.

Centricity PACS, Centricity PACS-IW, and Centricity Enterprise Archive backend application servers support a conceptual Storage AE that may be named differently in their conformance statements.

Please refer to the below link for DICOM Conformance Statement of the appropriate backend application server for more information.

CPACS

PACS 2.1 DICOM Conformance Statement (gehealthcare.com)

PACS-IW

Centricity PACS-IW Server 5.0 DICOM Conformance Statement Rev3 (gehealthcare.com)

EA

FIGURE 2-1
DATA FLOW DIAGRAM OF STORAGE AE FOR SOP INSTANCE DISPLAY

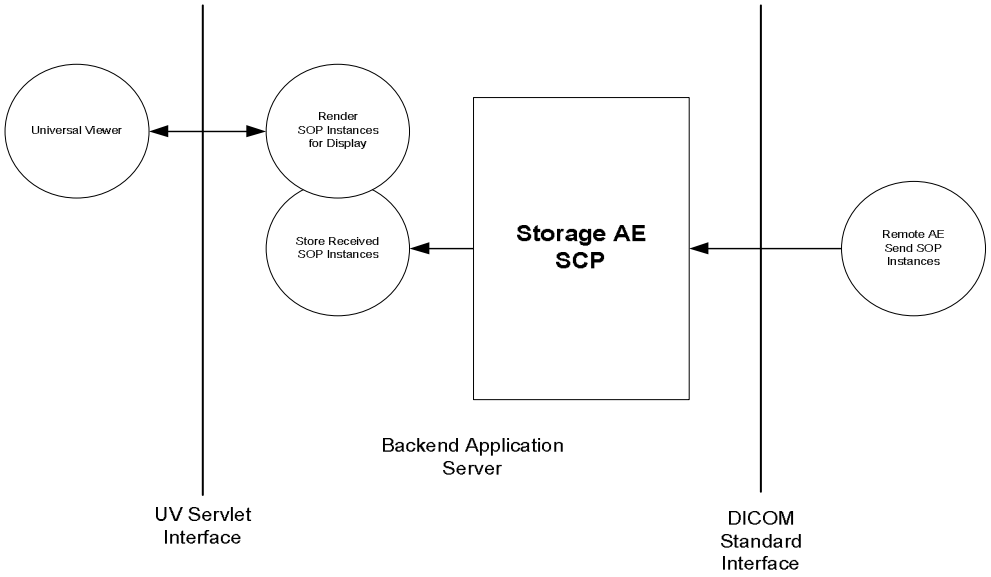

2.2.1.2 Send AE for SOP Instance Transfer to Remote AE

The Send AE implements the SCU roles of the DICOM Storage SOP classes for sending DICOM Storage SOP instances to a remote AE.

Note: The Send AE services are provided by their configured backend application server. As such, Universal Viewer ZFP does not directly initiate DICOM network features related to Send AE. It communicates to the backend application server using an internal service API.

At this time, only the Centricity PACS and Centricity Enterprise Archive backend application servers provide the Send AE service.

Please refer to the below link for DICOM Conformance Statement of the appropriate backend application server for more information.

CPACS

PACS 2.1 DICOM Conformance Statement (gehealthcare.com)

PACS-IW

Centricity PACS-IW Server 5.0 DICOM Conformance Statement Rev3 (gehealthcare.com)

EA

FIGURE 2-2
DATA FLOW DIAGRAM OF SEND AE FUNCTIONALITY

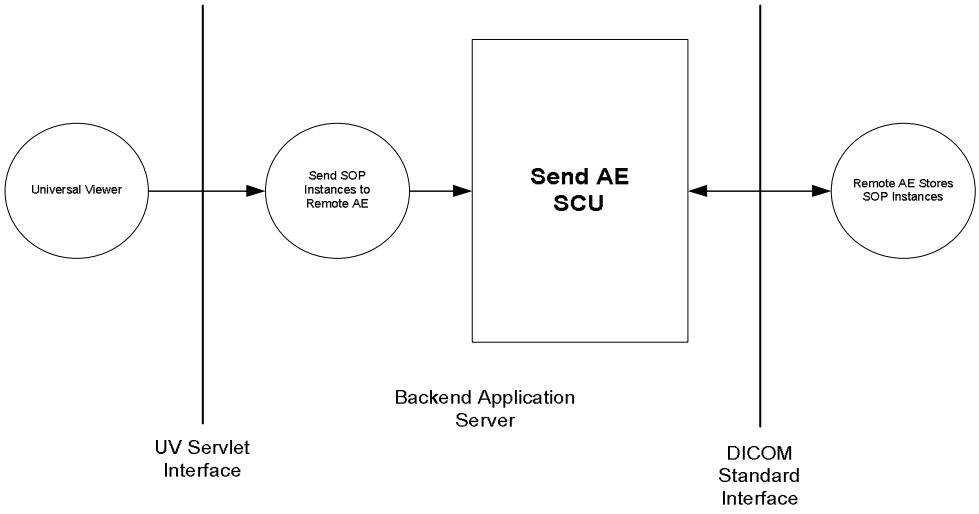

2.2.1.3 Query/Retrieve AE Functionality

Note: The Query/Retrieve AE services are provided by the configured backend application server. Universal Viewer ZFP communicates to the backend application server using a host service API and thus does not directly initiate DICOM network features related to Query/Retrieve.

Centricity PACS, Centricity PACS-IW, and Centricity Enterprise Archive backend application servers support Query/Retrieve AE.

Please refer to the below link for DICOM Conformance Statement of the appropriate backend application server for more information.

CPACS

PACS 2.1 DICOM Conformance Statement (gehealthcare.com)

PACS-IW

Centricity PACS-IW Server 5.0 DICOM Conformance Statement Rev3 (gehealthcare.com)

EA

CENTRICITY ENTERPRISE ARCHIVE 4.0: DIRECTION # DOC0708777 REV. 21

FIGURE 2-3
DATA FLOW DIAGRAM OF QUERY/RETRIEVE AE FUNCTIONALITY

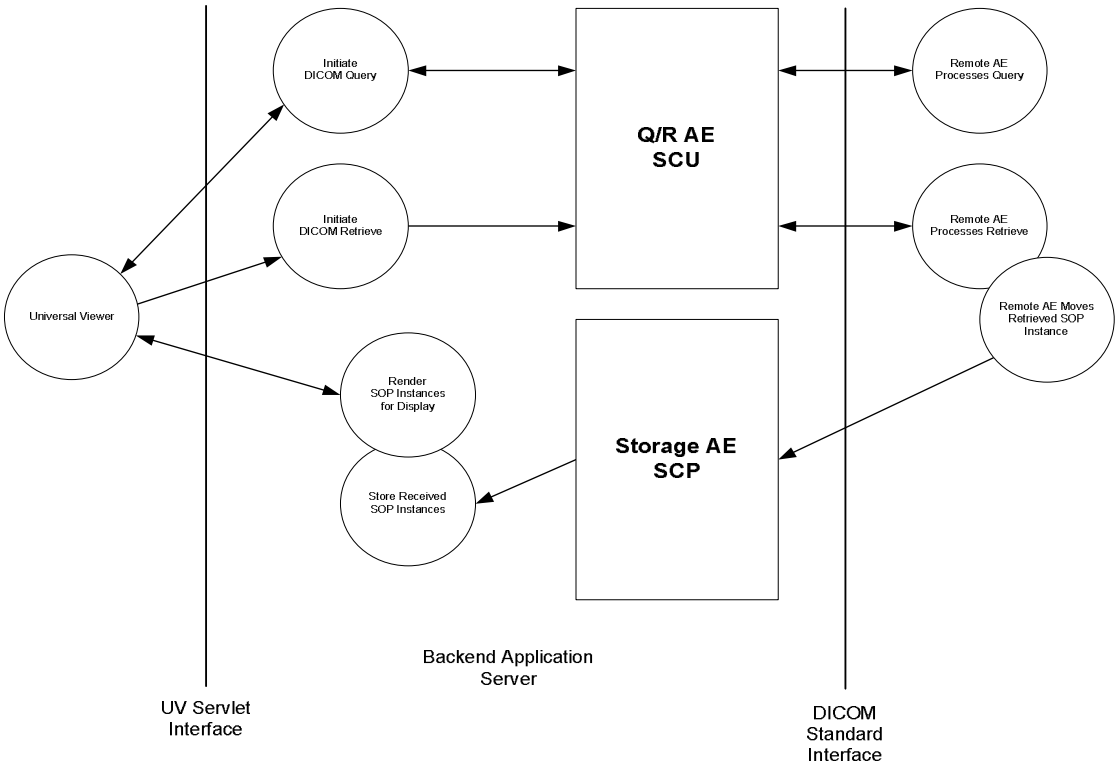

2.2.2 Real-World Activity – Viewing a DICOM Object

The user can load any supported DICOM object into the Universal Viewer ZFP for viewing.

2.2.3 Sequencing of Real-World Activities

2.2.3.1 Real-World Activity – Viewing a DICOM Object

The user may load any supported DICOM object into the Universal Viewer ZFP for viewing.

2.2.3.2 Real World Activity – Creation of Grayscale Presentation States

The user may create Grayscale Presentation States in the Universal Viewer ZFP and save the results in the configured backend server using direct access services.

2.3 EXTENSIONS / SPECIALIZATIONS / PRIVATIZATIONS

2.3.1 Window/Level Computation

It is expected that optimal Window Center and Width values are specified in the DICOM Object Objects if they have greater than 8 bits of data stored per sample. If optimal Window Center and Width values are not provided, then Universal Viewer ZFP is capable of estimating values using histogram analysis.

2.3.2 Pixel Spacing Handling

The Universal Viewer ZFP supports use of the pixel spacing / Imager Pixel Spacing attributes described below for different types of images including secondary capture to calculate and display geometric measurement results in images. The user is strongly advised to verify the logic below is compatible with the pixel spacing / Imager Pixel Spacing / ERMF information provided by the modalities used at their site.

DICOM Attributes	Attributes existed in Header		Geometric Measurement for CR / DX image	Geometric Measurement for XA / RF / MG image
	YES	NO		
Pixel Spacing (0028,0030)	X			
Imager Pixel Spacing (0018,1164)		X		
ERMF (0018,1114)		X	in unit (Cm)	in unit (Cm)
Pixel Spacing (0028,0030)		X		
Imager Pixel Spacing (0018,1164)	X			
ERMF (0018,1114)		X	in unit (Cm)	pixels
Pixel Spacing (0028,0030)	X			
Imager Pixel Spacing (0018,1164)	X			
ERMF (0018,1114)		X	in unit (Cm)	if PS = IPS, then pixels If PS ≠ IPS, then in unit (Cm)
Pixel Spacing (0028,0030)		X		
Imager Pixel Spacing (0018,1164)		X		
ERMF (0018,1114)		X	pixels	pixels
Pixel Spacing (0028,0030)	X			
Imager Pixel Spacing (0018,1164)		X		
ERMF (0018,1114)	X		in unit (Cm)	in unit (Cm)
Pixel Spacing (0028,0030)		X		
Imager Pixel Spacing (0018,1164)	X			
ERMF (0018,1114)	X		pixels	pixels
Pixel Spacing (0028,0030)	X		if PS = IPS, then pixels If PS ≠ IPS, then in unit (Cm)	if PS = IPS, then pixels If PS ≠ IPS, then in unit (Cm)
Imager Pixel Spacing (0018,1164)	X			

2.3.3 Electrocardiogram Support

The Universal Viewer ZFP supports use Electrocardiogram from GE Modalities and their attributes with the exception specific validations that are included to ensure accurate waveform calculations.

2.3.3.1 Waveform display

ZFP will support ECG waveform display if the DICOM file confirms to the below table. Any value other than the expected values will result in invalidating the DICOM file and user will be presented with an error message.

Attribute Name	Tag	Type	Expected Value
Waveform Originality	(003A, 0004)	1	ORIGINAL (Only one sequence should be present) DERIVED (Only one sequence should be present)
Number of Waveform Channels	(003A, 0005)	1	<=13 (including all standard 12 leads + "-aVR")
>>Channel Baseline	(003A, 0213)	1C	0
>>Channel Time Skew	(003A, 0214)	1C	0
>>Channel Sample Skew	(003A, 0215)	1C	0
>>Channel Offset	(003A, 0218)	3	0
Channel Sensitivity	(003A, 0210)	1C	Has to be present with a Non zero value. Although DICOM says its optional, but ZFP mandates it.
Channel Sensitivity Units Sequence	(003A, 0211)	1C	Millivolt or Microvolts DICOM says its optional, but ZFP mandates it.
Manufacturer	(0008, 0070)	2	"GE Healthcare" or "GE Medical Systems"
Waveform Bits Stored	(003A,021A)	1	16
Waveform Bits Allocated	(5400,1004)	1	16
Waveform Sample Interpretation	(5400,1006)	1	SS
Waveform Padding Value	(5400,100A)	1C	0

2.3.3.2 Coding Scheme Designator validations

ZFP will validate and parse a DICOM file and if the following Coding Scheme designators are adhered to, otherwise an error will be thrown to user:

Attribute Name	Tag	Supported coding scheme designator

Channel Sensitivity Unit sequence	(003A, 0211)	UCUM
Channel Source Sequence	(003A, 0208)	SCPECG

2.3.3.3 Pacemaker Annotation

Per DICOM. Pacemaker annotations like other annotations can be linked to specific channels/leads. ZFP does not accept pace maker annotation with any lead information. It just accepts a set of points on the 10 second time scale (in terms of TimeValue (ms) or SamplePosition).
ZFP will check if the pace maker information applies to all the channels or not. If not, throw an exception.
ZFP will identify if an annotation is pace maker annotation or not based on code value 5.10.1.2 and scheme as SCPECG.

Code Value	SH	8	5.10.1.2
Coding Scheme Design	SH	8	SCPECG
Coding Scheme Version	SH	4	1.3
Code Meaning	LO	16	Pacemaker Spike

The pacemaker information will be read when the below conditions are satisfied. In case it is not satisfied, no error will be thrown but just the pace maker information will not be displayed on the waveform

Attribute Name	**Tag**	**Expected Value**
Waveform Originality	(0040, A0B0)	1\0 (Applies to all the channels within the multiplex group)
Temporal Range Type	(0040, A130)	POINT
Referenced Sample Positions	(0040, A132)	“TimeValue” (GE modality specific) – NonDICOM, or “SamplePosition”

2.4 SUPPORT OF EXTENDED CHARACTER SETS

The Universal Viewer ZFP is configurable with a single single-byte or multi-byte extended character set, depending on the language selected during installation of the system. The following extended Character Sets are supported:

TABLE 2.3 Extended Character Set Support

Encoding	DICOM Term in Specific Character Set (0008,0005)	Supported Languages
ASCII	Attribute is not present or ISO IR-6	English

Latin-1	ISO IR-100	English, Faeroese, Finnish, French, German, Italian, Portuguese, Spanish,
Latin-2	ISO IR-101	English, Polish, Hungarian.
Latin/Cyrillic	ISO IR-144	English, Russian
Latin/Hebrew	ISO IR-138	English, Hebrew
JIS X 0201	ISO IR-13	English, Japanese (in Katakana alphabet). Limited use as Japanese encoding does not support hieroglyphic alphabet
JIS X 0208	ISO 2022 IR-87	English, Japanese Kanji (hieroglyphic) – uses escape sequences to switch between ASCII (single byte) and Japanese (two-byte per character)
KS X 1001	ISO 2022 IR-149	English, Korean – uses escape sequences to switch between ASCII (single byte) and Korean (two-byte per character)
GB18030	GB18030	English, Simplified Chinese
UTF8 for Dicom Web Services	UTF8	All supported languages

While the backend servers may support additional character sets, the Universal Viewer ZFP will display in the user interface only characters specified as within ISO IR-6 (ASCII) or the configured extended character set.

The user interface will allow the user to enter characters from the console keyboard that are within ASCII or the configured extended character set.

Whether character sets are displayed correctly depends on the characteristics of the backend system, the validity of the DICOM header contents, and the presence of appropriate fonts on the client system.

2.5 PHOTOMETRIC INTERPRETATION SUPPORT

While the backend server may support additional values for photometric interpretation, the Universal Viewer ZFP will only display SOP instances that contain one of the following values for Photometric Interpretation (0028,0004):

- MONOCHROME1
- MONOCHROME2
- RGB
- YBR_FULL: Supported
- YBR_FULL_422: Supported. Note: JPEG Baseline (1.2.840.10008.1.2.4.50) Transfer Syntax only - SDK doesn't decompress
- YBR_PARTIAL_422: Retired
- YBR_PARTIAL_420: Supported. Note: MPEG2, MPEG-4 AVC/H.264 and HEVC/H.265 (1.2.840.10008.1.2.4.10X) Transfer Syntaxes only - SDK doesn't decompress
- YBR_ICT: Supported
- YBR_RCT: Supported

2.6 SECURITY PROFILES

The product does not conform to any defined DICOM Security Profiles.
It is assumed that the product is used within a secured environment. It is assumed that a secured environment includes at a minimum:

1. Firewall or router protections to ensure that only approved external hosts have network access to the product.
2. Firewall or router protections to ensure that the product only has network access to approved external hosts and services.
3. Any communications with external hosts and services outside the locally secured environment use appropriate secure network channels (such as a Virtual Private Network (VPN))

2.7 DICOM WEB SERVICE

DICOMWEB(TM) NETWORK APPLICATION MODEL AND DATA FLOW DIAGRAM

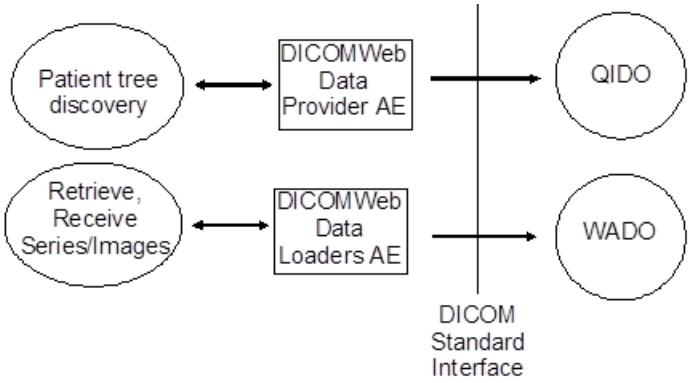

TABLE 2.4 Network Services

Network Service	User of Service (Client)	Provider of Service (Server)
WADO - URI - Retrieve Rendered Imaging Document	Yes	No
WADO-RS	Yes	No
QIDO-RS	Yes	No

2.7.1 WADO-URI Specification

This Universal Viewer ZFP Patient Timeline product implements the WADO-URI services as a client user for access to rendered DICOM SOP Instances that are stored on a server supporting DICOM WADO-URI service.

TABLE 2.5 WADO-URI Retrieve Imaging Document Specification

Parameter	Restrictions
Mime Type	Image JPEG

2.7.2 WADO-RS Specification

This Universal Viewer ZFP product implements the WADO-RS services as a client user for access to rendered DICOM SOP Instances that are stored on a server supporting DICOM WADO-RS service. The Retrieve Transaction user agent can request the following resources:

TABLE 2.6 Resources Retrieve Transaction - User Agent

Transaction	Resource	Comments
Retrieve	*Instance*	The implementation follows the standard URI pattern "{SERVICE}/studies/{StudyInstanceUID}/series/{SeriesInstanceUID} /instances/{SOPInstanceUID} Within the {SERVICE} part consumers can provide the AE title if the VNA supports the handling of multiple AETs

The Retrieve Transaction user agent supports the following Query Parameters:
The Media Type column Identifies if the query parameter is valid for **D**ICOM (D) and/or for **R**endered Media type (R).

TABLE 2.7 Query Parameters Retrieve Transaction - User Agent

Query Parameter	Value Type	Media Type	Supported values	Comments
Accept	*Media-type*	*D, R*	See table 2.1 Transfer Syntaxes with DICOMWeb bulk data media type	

The Retrieve Transaction user agent supports the following Header Fields:
The Media Type column Identifies if the query parameter is valid for **D**ICOM (D) and/or for **R**endered Media type (R).

TABLE 2.8 Header Fields Retrieve Transaction - User Agent

Header Field	Value Type	Media Type	Supported values	Comments
Accept	*DICOM media-type* *(application/ dicom)*	***D***	*multipart/related; type="application/dicom"; transfer-syntax={uid}*	See in the overview section table 2-3.2-1 the supported DICOM SOP Classes / table 2-3.2-2 Transfer Syntaxes

TABLE 2.9 WADO-RS Retrieve Imaging Document Specification

Parameter	Supported

Mime Type	application/dicom

2.7.3 QIDO-RS Specification

This Universal Viewer ZFP product implements the QIDO-RS services as a client user for access to rendered DICOM SOP Instances that are stored on a server supporting DICOM QIDO-RS service.

TABLE 2.10 Resources Search Transaction - User Agent

Transaction	Resource	Comments
Search	All studies	
	All series	
	All instances	
	Study's Series	
	Study's instances	
	Study Series's Instances	

TABLE 2.11 lists the DICOM query attributes supported by the Search Transaction user agent.

Attribute Name	Tag	Matching Key	Return Key	Comments
Study Level (May be used for All studies, All series, All instance resource query)				
SpecificCharacterSet	(0008,0005)	No	Yes	
StudyDate	(0008,0020)	No	Yes	
StudyTime	(0008,0030)	No	Yes	
AccessionNumber	(0008,0050)	No	Yes	
ModalitiesInStudy	(0008,0061)	No	Yes	
ReferringPhysicianName	(0008,0090)	No	Yes	
TimezoneOffsetFromUTC	(0008,0201)	No	Yes	
PatientName	(0010,0010)	No	Yes	
PatientID	(0010,0020)	No	Yes	
PatientBirthDate	(0010,0030)	No	Yes	
PatientSex	(0010,0040)	No	Yes	
StudyInstanceUID	(0020,000D)	Yes	Yes	
StudyID	(0020,0010)	No	Yes	
NumberOfStudyRelatedSeries	(0020,1206)	No	Yes	
NumberOfStudyRelatedInstances	(0020,1208)	No	Yes	
Series Level (May be used for All Series, Study's Series, Study's Instances, All Instances resource query)				
SpecificCharacterSet	(0008,0005)	No	Yes	
Modality	(0008,0060)	No	Yes	
TimezoneOffsetFromUTC	(0008,0201)	No	Yes	
SeriesDescription	(0008,103E)	No	Yes	
SeriesInstanceUID	(0020,000E)	Yes	Yes	

Attribute Name	Tag	Matching Key	Return Key	Comments
SeriesNumber	(0020,0011)	No	Yes	
NumberOfSeriesRelatedInstances	(0020,1209)	No	Yes	
PerformedProcedureStepStartDate	(0040,0244)	No	Yes	
PerformedProcedureStepStartTime	(0040,0245)	No	Yes	
RequestAttributeSequence	(0040,0275)	No	Yes	
> RequestedProcedureID	(0040,1001)	No	Yes	
> ScheduledProcedureStepID	(0040,0009)	No	Yes	
Instance Level (May be used for All instances, Study's instance, Study Series's instance resource query)				
SpecificCharacterSet	(0008,0005)	No	Yes	
SOPClassUID	(0008,0016)	No	Yes	
SOPInstanceUID	(0008,0018)	Yes	Yes	
InstanceAvailability	(0008,0056)	No	Yes	
TimezoneOffsetFromUTC	(0008,0201)	No	Yes	
RetrieveURL	(0008,1190)	No	Yes	
InstanceNumber	(0020,0013)	No	Yes	
Rows	(0028,0010)	No	Yes	
Columns	(0028,0011)	No	Yes	
BitsAllocated	(0028,0100)	No	Yes	
NumberOfFrames	(0028,0008)	No	Yes	

TABLE 2.12 QIDO-RS Retrieve Imaging Document Specification

Parameter	Supported
Mime Type	application/dicom+json

2.7.4 Status Code details of DICOM Web services :

Status Class	Code	Behavior [Describe the Application behavior when receiving the status code]
Success	200 (Success)	DICOM web service will log – Successfully retrieved search records
	204 (No-Content)	DICOM web service will log – No search result is retrieved.
	206 (Partial Content)	Status code is 200, Partial flag is sent from DICOM web service application
Client Error	400 (Bad Request)	DICOM web service will log the actual error.
	401 (Unauthorized)	DICOM web service will log the actual error
	403 (Forbidden)	DICOM web service will log the actual error
	404 (Not Found)	DICOM web service will log the actual error

Status Class	Code	Behavior [Describe the Application behavior when receiving the status code]
	405 (Method Not Allowed)	DICOM web service will log the actual error
	406 (Not AccepTable)	DICOM web service will log the actual error
	409 (Conflict)	DICOM web service will log – Unable to process search request.
	410 (Gone)	DICOM web service will log the actual error
	411 (Length Required)	DICOM web service will log – Unable to process search request.
	413 (Payload Too Large)	DICOM web service will log the actual error
	414 (URI Too Long)	DICOM web service will log – Unable to process search request.
	415 (Unsupported Media Type)	DICOM web service will log the actual error
Server Error	500 (Internal Server Error)	DICOM web service will log – Unable to process search request.
	501(Not Implemented)	DICOM web service will log the actual error
	503 (Service Unavailable)	DICOM web service will log – Unable to process search request.
	505 (HTTP Version Not Supported)	DICOM web service will log the actual error

2.8 RETRIVE IMAGING DOCUMENT SET

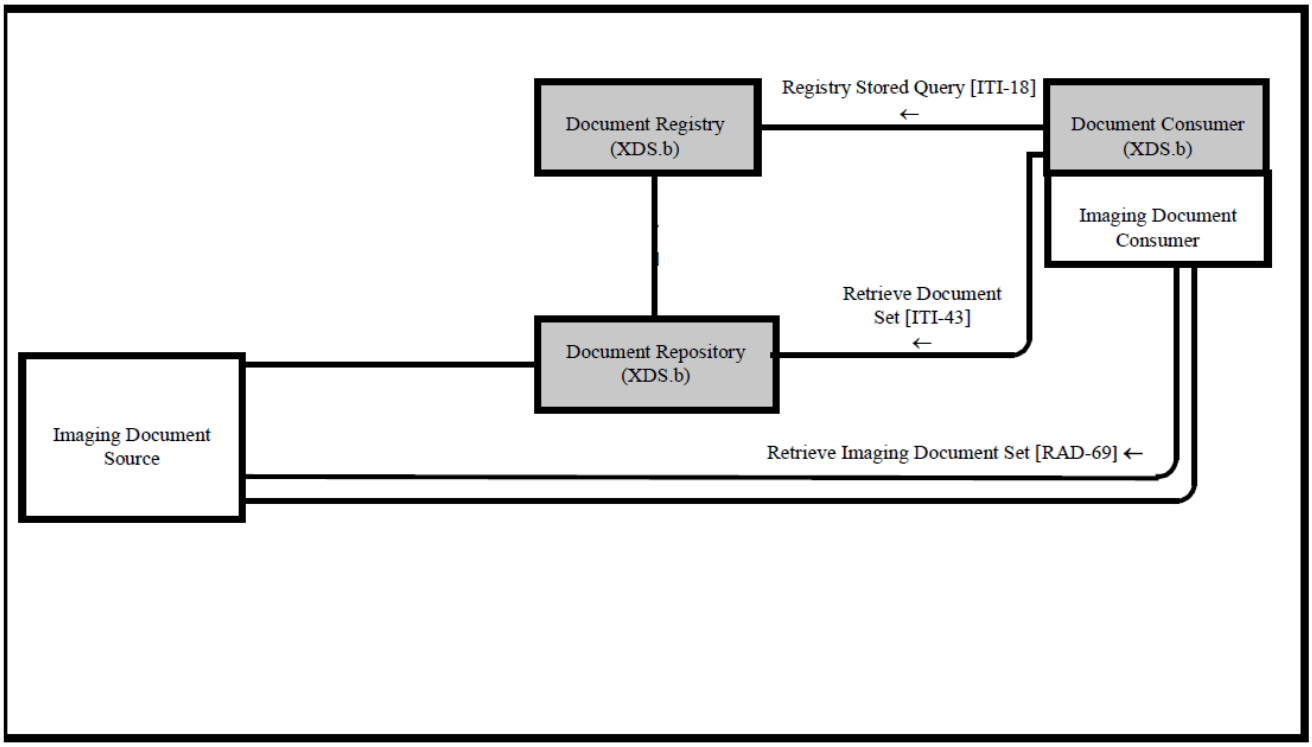

This Universal Viewer ZFP product(Imaging Document Consumer) uses implements the RAD-69 services as a client user for access to rendered DICOM SOP Instances that are stored on a server supporting DICOM RAD-69 Retrieve Imaging document set service.

To retrieve document ID, application uses ITI-18 (Registry Stored Query) and to retrieve KOS document, ZFP application (imaging document consumer) uses ITI-43 IHE protocol, using which all the SOP instances information is sent to RAD-69 enable imaging source by using SOAP based protocol.

2.9 AUDIT TRAIL MESSAGES

The Universal Viewer ZFP supports the Audit Trail Message Format Profile. The following subsections define message details and specializations used by this product.

2.9.1 Application Activity

This audit message describes the event of users logging in or out of the application and it includes the following IHE transactions: ITI-2.

TABLE 2.13 Audit Message for Application Activity – Login/Logout

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110114, DCM, "UserAuthenticated")
	EventActionCode	M	Enumerated Value E = Execute
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	DT (110122, DCM, "Login") DT (110122, DCM, "Logout")
Active Participant: Process Accepting the Login/Logout (1)	UserID	M	ZFP Server URL
	AlternativeUserID	U	None
	UserName	U	ZFP Client Node IP Address
	UserIsRequestor	U	False
	RoleIDCode	M	EV (110150, DCM, "Application")
	NetworkAccessPointTypeCode	M	2
	NetworkAccessPointID	M	ZFP Client Node IP Address
Active Participant: User Logging Into/Logging out from Application (2)	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	N/A
	UserIsRequestor	U	True
	RoleIDCode	U	EV (110151, DCM, "Application Launcher")
	NetworkAccessPointTypeCode	U	None
	NetworkAccessPointID	U	None
Audit Source Identification	AuditSourceID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None

2.9.2 Instance Accessed

This message describes the event of Instance sent and it includes the following IHE transactions: RAD-16 / RAD-17 / RAD-27 / RAD-31 / RAD-45 / RAD-69.

TABLE 2.14 Audit Message for Instance Accessed / Study Used

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110103, DCM, "DICOM Instances Accessed")
	EventActionCode	M	Enumerated Value R = Retrieve C = Create for SaveGSPS
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	U	None
Active Participant: User	UserID	M	Logged in User Account ID

Accessing Study (1)	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	True
	RoleIDCode	M	EV (1, RFC-3881, "Person")
	NetworkAccessPointTypeCode	U	None
	NetworkAccessPointID	U	None
Active Participant: System Accessing Study (2)	UserID	M	Image streaming URL
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	U	False
	RoleIDCode	M	EV (2, RFC-3881, "System Object")
	NetworkAccessPointTypeCode	U	None
	NetworkAccessPointID	U	None
Participating Object: Studies being accessed (1)	ParticipantObjectTypeCode	M	2
	ParticipantObjectTypeCodeRole	M	3
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV (110180,DCM,"Study Instance UID")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Study Instance UID
	ParticipantObjectName	U	None
	ParticipantObjectQuery	U	None
	ParticipantObjectDetail	U	None
	ParticipantObjectDescription	U	None
	SOPClass	U	SOPClassUID
	Accession	U	Study Accession number
	NumberOfInstances	U	SopClass number of instances
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Participating Object: Patient being accessed (2)	ParticipantObjectTypeCode	M	1
	ParticipantObjectTypeCodeRole	M	1
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(2, RFC-3881,"Patient Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient Identifier
	ParticipantObjectName	U	PatientName
	ParticipantObjectQuery	U	None
	ParticipantObjectDetail	U	None
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None

2.9.3 Query

This message describes the event of a Query being issued or received. It includes the following IHE transactions: RAD-14 / RAD-15 / RAD-26 / RAD-30 / RAD-44.

TABLE 2.1 Audit Message for Query

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110112, DCM, "Query")
	EventActionCode	M	Enumerated Value: E = Execute
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	None
Active Participant: User requesting Query (1)	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None

	UserIsRequestor	M	True
	RoleIDCode	M	EV (110153, RFC-3881, "Source")
	NetworkAccessPointTypeCode	U	None
	NetworkAccessPointID	U	None
Active Participant: System requesting Query (2)	UserID	M	Image streaming URL
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	U	False
	RoleIDCode	M	EV (110152, RFC-3881, "Destination")
	NetworkAccessPointTypeCode	M	2
	NetworkAccessPointID	M	EA/CPACS IP Address of archives to search
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None
Participating Object: SOP Queried and the Query (1)	ParticipantObjectTypeCode	M	Enumerated Value: 4
	ParticipantObjectTypeCodeRole	M	Enumerated Value: 3 = report
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV (4, RFC-3881, "Other")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	GUID Value, (randomly generated UUID as GUID value by ZFP)
	ParticipantObjectName	U	None
	ParticipantObjectQuery	U	None
	ParticipantObjectDetail	MC	Type value = "Detail" and the Value of the attribute is the Patient/Study details being queried. The element content is an xs:base64Binary encoding.
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None

AUDIT MESSAGE FOR PDQ QUERY

This message describes the event of a Patient Demographics Query being issued or received. It includes the following IHE transactions: ITI-21.

TABLE 2.16 Audit Message for PDQ Query

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110112, DCM, "Query")
	EventActionCode	M	Enumerated Value: E = Execute
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	EV ("ITI-21", IHE Transactions, "Patient Demographics Query")
Active Participant: User requesting Query (1)	UserID	M	ZFP Server URL
	AlternativeUserID	M	Logged in User Account ID
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	2
	NetworkAccessPointID	M	ZFP Client Node IP Address
Active Participant: Human Requestor (2)	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	U	True
	RoleIDCode	U	EV (110151, DCM, "Application Launcher")
	NetworkAccessPointTypeCode	U	None
	NetworkAccessPointID	U	None
Active Participant: System requesting Query (3)	UserID	M	PdqSupplierApplicationName | PdqSupplierFacilityName (Configurable)
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	False

	RoleIDCode	M	EV (110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	2
	NetworkAccessPointID	M	MPI FQDN IP Address
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None
Participating Object: Patient Queried (optional – only used with enterprise patient identifier query)	ParticipantObjectTypeCode	M	Enumerated Value: 1
	ParticipantObjectTypeCodeRole	M	Enumerated Value: 1
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV ("2", RFC-3881, "Patient Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient Identifier and Affinity Domain values to be queried
	ParticipantObjectName	U	None
	ParticipantObjectQuery	U	None
	ParticipantObjectDetail	U	None
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Participating Object: Patient Queried and the Query (1)	ParticipantObjectTypeCode	M	Enumerated Value: 2 = system
	ParticipantObjectTypeCodeRole	M	Enumerated Value: 24
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV ("ITI-21", IHE Transactions, "Patient Demographics Query")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	U	None
	ParticipantObjectName	U	None
	ParticipantObjectQuery	M	This field holds the PDQ query details as xs:base64Binary encoded.
	ParticipantObjectDetail	MC	The Type = "MSH-10" and the value of this attribute is the double encoded timestamp of the request. The element content is an xs:base64Binary encoding.
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None

AUDIT MESSAGE FOR PIX QUERY

This message describes the event of a Patient Identifier Query being issued or received. It includes the following IHE transactions: ITI-9.

TABLE 2.17 Audit Message for PIX Query

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110112, DCM, "Query")
	EventActionCode	M	Enumerated Value: E = Execute
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	EV ("ITI-9", IHE Transactions, "PIX Query")
Active Participant: User requesting Query (1)	UserID	M	ZFP Server URL
	AlternativeUserID	M	Logged in User Account ID
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	2
	NetworkAccessPointID	M	ZFP Client Node IP Address
Active Participant: Human Requestor (2)	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None

	UserName	U	None
	UserIsRequestor	U	True
	RoleIDCode	U	EV (110151, DCM, "Application Launcher")
	NetworkAccessPointTypeCode	U	None
	NetworkAccessPointID	U	None
Active Participant: System requesting Query (3)	UserID	M	PixManagerApplicationName | PixManagerFacilityName (Configurable)
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	2
	NetworkAccessPointID	M	MPI FQDN IP Address
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None
Participating Object: Patient Queried (1)	ParticipantObjectTypeCode	M	Enumerated Value: 1
	ParticipantObjectTypeCodeRole	M	Enumerated Value: 1
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV ("2", RFC-3881, "Patient Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient Identifier and Assigning Authority values to be queried
	ParticipantObjectName	U	None
	ParticipantObjectQuery	U	None
	ParticipantObjectDetail	U	None
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Participating Object: Patient Query (2)	ParticipantObjectTypeCode	M	Enumerated Value: 2 = system
	ParticipantObjectTypeCodeRole	M	Enumerated Value: 24
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV ("ITI-9", IHE Transactions, "PIX Query")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	U	None
	ParticipantObjectName	U	None
	ParticipantObjectQuery	M	This field holds the PIX query details as xs:base64Binary encoded.
	ParticipantObjectDetail	MC	The Type = "MSH-10" and the value of this attribute is the double encoded timestamp of the request. The element content is an xs:base64Binary encoding.
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None

2.9.4 Registry Stored Query

This message describes the event of ITI-18 i.e. Registry Stored Query.

TABLE 2.18 Audit Message for Registry Stored Query

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110112, DCM, "Query")
	EventActionCode	M	Enumerated Value: E = Execute
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0

	EventTypeCode	M	EV (“ITI-18”, IHE Transactions, "Registry Stored Query")
Active Participant (1): User processing request.	UserID	M	ZFP Server URL
	AlternativeUserID	M	ZFP Client Node Machine Name
	UserName	U	None
	UserIsRequestor	U	True
	RoleIDCode	M	EV (110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	1
	NetworkAccessPointID	M	ZFP Client Node Machine Name
Active Participant (2): User processing request.	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	U	True
	RoleIDCode	M	EV (110151, DCM, "Application Launcher")
	NetworkAccessPointTypeCode	M	None
	NetworkAccessPointID	M	None
Active Participant (3): System to receive request.	UserID	M	Registry URL for Registry Stored Query (for XDS, XDS-I profile), Initiating Gateway URL for Registry Stored Query (For XCA-I profile)
	AlternativeUserID	U	Registry URL for Registry Stored Query
	UserName	U	None
	UserIsRequestor	U	False
	RoleIDCode	M	EV (110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	2
	NetworkAccessPointID	M	FQDN of XDS Registry (for XDS , XDS-i profile), FQDN of Initiating Gateway (For XCA-I profile)
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None
Participating Object: Patient to query (1)	ParticipantObjectTypeCode	M	1
	ParticipantObjectTypeCodeRole	M	1
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(2, RFC-3881, “Patient Number”)
	ParticipantObjectSensitivity	U	Patient Name
	ParticipantObjectID	M	Patient Identifier and Affinity Domain values to be queried
	ParticipantObjectName	U	None
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Participating Object: Registry query (2)	ParticipantObjectTypeCode	M	2
	ParticipantObjectTypeCodeRole	M	24
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV (“ITI-18”, IHE Transactions, "Registry Stored Query")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Urn:uuid for Registry Stored Query
	ParticipantObjectName	U	None
	ParticipantObjectDescription	U	This field holds the dataset of the registry stored query, xs:base64 binary encoded.
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None

2.9.5 Retrieve Document Set

This message describes an event of Retrieve Document Set and it includes the following transaction ITI-43.

TABLE 2.19 Audit Message for Retrieve Document Set

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110107, DCM, "Import")
	EventActionCode	M	Enumerated Value: C = Create

	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	EV("ITI-43", IHE Transactions, "Retrieve Document Set")
Active Participant (1): Repository System	UserID	M	Repository URL (for XDS profile, XDS-i profile) Initiating Gateway URL (For XCA-I profile)
	AlternativeUserID	U	"Repository"
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	2
	NetworkAccessPointID	M	FQDN of XDS Repository (for XDS , XDS-i profile), FQDN of Initiating Gateway (For XCA-I profile)
Active Participant (2): User requesting document set	UserID	M	Logged in User Account ID
	AlternativeUserID	M	ZFP AuditSourceId (Configurable)
	UserName	U	None
	UserIsRequestor	U	False
	RoleIDCode	M	EV (110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	1
	NetworkAccessPointID	U	Repository IP Address(for XDS , XDS-i profile), FQDN of Initiating Gateway (For XCA-I profile)
Active Participant (3): User requesting document set	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	U	True
	RoleIDCode	M	EV (110152, DCM, "Application Launcher")
	NetworkAccessPointTypeCode	U	None
	NetworkAccessPointID	U	None
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None
Participating Object (1): Requested Document	ParticipantObjectTypeCode	M	2
	ParticipantObjectTypeCodeRole	M	3
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(9, RFC-3881, "Report Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	U	None
	ParticipantObjectName	U	None
	ParticipantObjectDetail	M	Type="Repository Unique Id"; Value=<Repository OID>, xs:base64Binary encoded.
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Participating Object (2): Patient Information	ParticipantObjectTypeCode	M	1
	ParticipantObjectTypeCodeRole	M	1
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(2, RFC-3881, "Patient Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient Identifier and Affinity Domain values to be queried
	ParticipantObjectName	U	Patient Name
	ParticipantObjectDetail	U	None
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None

2.9.6 Update Document Set

This message describes an event of Update Document Set (document administrator) and it includes the following transaction: ITI-57.

TABLE 2.20 Audit Message for Update Document Set

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110106, DCM, "Export")
	EventActionCode	M	Enumerated Value: U = Update
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	EV("ITI-57", IHE Transactions, "Update Document Set")
Active Participant: User updating document (1)	UserID	M	Logged in User Account ID
	AlternativeUserID	M	ZFP Process ID
	UserName	U	None
	UserIsRequestor	M	True
	RoleIDCode	M	EV (110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	1
	NetworkAccessPointID	M	ZFP Server Machine Name
Active Participant: Registry System (2)	UserID	M	Registry Update URL
	AlternativeUserID	U	Registry Update URL
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	1
	NetworkAccessPointID	M	XDS Registry FQDN IP Address
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None
Participating Object: Patient with document to be updated (1)	ParticipantObjectTypeCode	M	1
	ParticipantObjectTypeCodeRole	M	1
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(2, RFC-3881, "Patient Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient Identifier and Affinity Domain values for document
	ParticipantObjectName	U	Patient Name
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Participating Object: Document to be updated	ParticipantObjectTypeCode	M	2
	ParticipantObjectTypeCodeRole	M	20
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(Document UUID, "IHE XDS Metadata", Submission Set ClassificationNode")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Submissionset Unique ID
	ParticipantObjectName	U	None
	ParticipantObjectDescription	U	None
	ParticipationObjectDetail	M	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None

2.9.7 Document Viewed

This message describes the event of viewing data in the system, e.g. open document.

TABLE 2.21 Audit Message for Document Viewed

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110107, DCM, "Import")
	EventActionCode	M	Enumerated Value: C = Create
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	EV("DocumentViewed", ZFP-XDS Transactions, "Document Viewed")
Active Participant (1): System	UserID	M	ZFP Server URL
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	2
	NetworkAccessPointID	M	ZFP Server Machine Name
Active Participant (2): User viewing document.	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	True
	RoleIDCode	M	EV (1, RFC-3881, "Person")
	NetworkAccessPointTypeCode	M	2
	NetworkAccessPointID	M	ZFP Client Node IP Address
Participating Object: Document being Viewed (1)	ParticipantObjectTypeCode	M	2
	ParticipantObjectTypeCodeRole	M	3
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(9, RFC-3881,"Report Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Document Unique ID
	ParticipantObjectName	U	None
	ParticipantObjectQuery	U	None
	ParticipantObjectDetail	U	None
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Participating Object: Patient Information Viewed (2)	ParticipantObjectTypeCode	M	1
	ParticipantObjectTypeCodeRole	M	1
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(2, RFC-3881,"Patient Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient Identifier and Affinity Domain values for document
	ParticipantObjectName	U	Patient Name
	ParticipantObjectQuery	U	None
	ParticipantObjectDetail	U	None
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None

2.9.8 Document Download

This message describes the event of exporting data from the system, e.g. download document.

TABLE 2.20 Audit Message for Document Download

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110106, DCM, "Export")

	EventActionCode	M	Enumerated Value: R = Read
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	EV("DocumentDownload", ZFP-XDS Transactions, "Document Download")
Active Participant (1):	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	True
	RoleIDCode	M	EV (110152, DCM, "Destination")
	NetworkAccessPointTypeCode	U	2
	NetworkAccessPointID	U	ZFP Client Node IP Address
Active Participant (2):	UserID	M	ZFP Server URL
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	None
	NetworkAccessPointID	M	None
Active Participant (3):	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110154, DCM, " Destination Media")
	NetworkAccessPointTypeCode	M	None
	NetworkAccessPointID	M	None
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None
Participating Object: Document Downloaded (1)	ParticipantObjectTypeCode	M	2
	ParticipantObjectTypeCodeRole	M	3
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(110180, DCM, "DocumentUniqueId")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Document Unique ID
	ParticipantObjectName	U	None
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Participating Object: Patient Information for Document Downloaded (2)	ParticipantObjectTypeCode	M	1
	ParticipantObjectTypeCodeRole	M	1
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(2, RFC-3881, "Patient Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient Identifier and Affinity Domain values for document
	ParticipantObjectName	U	Patient Name
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None

2.9.9 Emergency Override

This message describes any event for which the system needs to report a security alert.

TABLE 2.23 Audit Message for Emergency Overridde

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110113, DCM, "Security Alert")
	EventActionCode	M	Enumerated Value E = Execute
	EventDateTime	M	System Current Date

Submitted by New Revision

	EventOutcomeIndicator	M	0
	EventTypeCode	M	EV (110127, DCM, "Emergency Override")
Active Participant: User executing override (1)	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110150, DCM, "Application")
	NetworkAccessPointTypeCode	M	1
	NetworkAccessPointID	M	ZFP Server Machine Name
Active Participant: Process executing override (2)	UserID	M	ZFP Server URL
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	True
	RoleIDCode	M	EV (110151, DCM, "Application Launcher")
	NetworkAccessPointTypeCode	U	None
	NetworkAccessPointID	U	None
Participating Object: Studies being transferred (1)	ParticipantObjectTypeCode	M	2
	ParticipantObjectTypeCodeRole	M	13
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(12, RFC-3881,"URI")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient Identifier and Affinity Domain values for document
	ParticipantObjectName	U	Patient Name
	ParticipantObjectQuery	U	None
	ParticipantObjectDetail	M	Type="Alert Description"; Value=<User Reason Comment>
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None

2.9.10 Instance Transferred

This message describes the event of the completion of transferring DICOM SOP Instances between two Application Entities. This message may only include information about a single patient.

TABLE 2.24 Audit Message for Instance Transferred

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110104, DCM, "DICOM Instances Transferred")
	EventActionCode	M	Enumerated Value E = Execute
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	None
Active Participant (1):	UserID	M	CPACS | AE Title (depending on where the study is coming from)
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	1
	NetworkAccessPointID	M	ZFP Server Machine Name
Active Participant (2):	UserID	M	AE Title (depending on where the study is transferred to)
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	True
	RoleIDCode	M	EV (110152, DCM, "Destination")
	NetworkAccessPointTypeCode	U	None
	NetworkAccessPointID	U	None
Active Participant (3):	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None

	UserIsRequestor	M	True
	RoleIDCode	M	EV (1, RFC-3881, "Person")
	NetworkAccessPointTypeCode	M	None
	NetworkAccessPointID	M	None
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None
Participating Object: Document Downloaded (1)	ParticipantObjectTypeCode	M	2
	ParticipantObjectTypeCodeRole	M	3
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(110180, DCM, "Study Instance UID")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	<Study Instance UID>
	ParticipantObjectName	U	None
	ParticipantObjectDescription	U	Contains Accession and SOPClasses
	SOPClass	U	SOPClass UIDs
	Accession	U	Accession Number
	NumberOfInstances	U	Number of instances per SOPClass
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Participating Object: Patient Information for Document Downloaded (2)	ParticipantObjectTypeCode	M	1
	ParticipantObjectTypeCodeRole	M	1
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(2, RFC-3881, "Patient Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient Identifier
	ParticipantObjectName	U	Patient Name
	ParticipantObjectDescription	U	None
	SOPClass	U	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None

2.9.11 Execute Document Workflow Task

This message describes the event of the completion of a document workflow task, e.g. update report state.

TABLE 2.25 Audit Message for Execute Document Workflow Task

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV ("Read", RAD, "Read Report"), EV ("Unread", RAD, "Unread Report")
	EventActionCode	M	Enumerated Value E = Execute
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	Document Workflow
Active Participant (1):	UserID	M	ZFP Server URL
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110150, DCM, "Application")
	NetworkAccessPointTypeCode	M	1
	NetworkAccessPointID	M	ZFP Server Machine Name
Active Participant (2):	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	True
	RoleIDCode	M	EV (110151, DCM, "Application Launcher")
	NetworkAccessPointTypeCode	U	2
	NetworkAccessPointID	U	ZFP Client Node IP Address
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None

Participating Object: Patient Information	ParticipantObjectTypeCode	M	1
	ParticipantObjectTypeCodeRole	M	1
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(2, RFC-3881, "Patient Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient Identifier and Affinity Domain values for document
	ParticipantObjectName	U	Patient Name
Participating Object: Report Information	ParticipantObjectTypeCode	M	2
	ParticipantObjectTypeCodeRole	M	3
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(9, RFC-3881, "Report Number")
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Document Unique ID
	ParticipantObjectName	U	None
	ParticipantObjectDetail	U	Type value = "Comments" and the Value of the attribute is the description for executing document workflow task. The element content is an xs:base64Binary encoding.

2.9.12 Retrieve Imaging Document Set

This message describes the event of the retrieving the document set. It includes the following IHE transactions: RAD-69.

TABLE 2.26 Retrieve Imaging Document Set Audit Message

Real World Entities	Field Name	Opt.	Value Constraints
Event	EventID	M	EV (110104, DCM, "DICOM Instances Transferred")
	EventActionCode	M	Enumerated Value R = Read
	EventDateTime	M	System Current Date
	EventOutcomeIndicator	M	0
	EventTypeCode	M	Document Workflow
Active Participant (1):	UserID	M	ZFP Server URL
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	False
	RoleIDCode	M	EV (110150, DCM, "Application")
	NetworkAccessPointTypeCode	M	1
	NetworkAccessPointID	M	ZFP Server Machine Name
Active Participant (2):	UserID	M	Logged in User Account ID
	AlternativeUserID	U	None
	UserName	U	None
	UserIsRequestor	M	True
	RoleIDCode	M	EV (110152, DCM, "Application Launcher")
	NetworkAccessPointTypeCode	U	2
	NetworkAccessPointID	U	ZFP Client Node IP Address
Participating Object: Studies being transferred (1)	ParticipantObjectTypeCode	M	2
	ParticipantObjectTypeCodeRole	M	3
	ParticipantObjectDataLifeCycle	U	None
	ParticipantObjectIDTypeCode	M	EV(110180,DCM,Study Instance UID)
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Study Instance UID
	ParticipantObjectName	U	None
	ParticipantObjectQuery	U	None
	ParticipantObjectDetail	U	None
	ParticipantObjectDescription	U	None
	SOPClass	MC	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Participating Object: Studies being transferred (2)	ParticipantObjectTypeCode	M	1
	ParticipantObjectTypeCodeRole	M	1
	ParticipantObjectDataLifeCycle	U	None

	ParticipantObjectIDTypeCode	M	EV(2, RFC-3381,Patient Number)
	ParticipantObjectSensitivity	U	None
	ParticipantObjectID	M	Patient ID
	ParticipantObjectName	U	None
	ParticipantObjectQuery	U	None
	ParticipantObjectDetail	U	None
	ParticipantObjectDescription	U	None
	SOPClass	MC	None
	Accession	U	None
	NumberOfInstances	U	None
	Instances	U	None
	Encrypted	U	None
	Anonymized	U	None
Audit Source Identification	Audit Source ID	U	ZFP AuditSourceId (Configurable)
	Code	U	4
	AuditEnterpriseSiteID	U	None